


PowerTech™


6135SFM85 Diesel Engine

Propulsion Engine Specifications



6135SFM85 shown

Dimensions

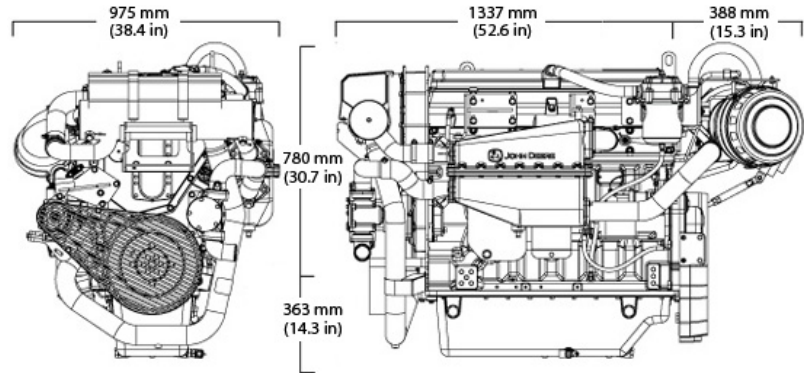

Certifications

EPA Commercial Marine Tier 3
IMO MARPOL Annex VI Compliant
NRMM (97/68/EC) as amended

General data

Model	6135SFM85	Length - mm (in)	1725 (67.9)
Number of cylinders	6	Width - mm (in)	975 (38.4)
Displacement - L (cu in)	13.5 (824)	Height, Centerline to Top-- mm. (in)	780 (30.7)
Bore and Stroke-- mm (in)	132 x 165 (5.20 x 6.50)	Height, Centerline to Bottom-- mm. (in)	363 (14.3)
Compression Ratio	16.0 : 1	Weight, dry-- kg (lb)	1426 (3144)
Engine Type	In-line, 4- Cycle	Maximum Installed Angle	Front Up – degrees 12 Front Down – degrees 0
Aspiration	Air-to-sea water		

Features and benefits

Turbocharged with Air-to-Sea Aftercooling

Cooler operation enables higher power ratings and higher efficiencies
Seawater aftercooled engines excel in higher power/speed applications

Four valves per cylinder

The 4-valve cylinder head provides excellent airflow resulting in greater low-speed torque and better transient response time.

Electronic Unit Injectors

The EUI fuel system provides higher injection. It also controls fuel injection timing and provides precise control for start, duration, and end of injection.


Integrated Heat Exchanger

Engine is cooled via seawater to engine coolant heat exchanger.


Offers a lighter, more compact, and simpler engine installation versus keel cooling.

Performance curve


M1 Rating

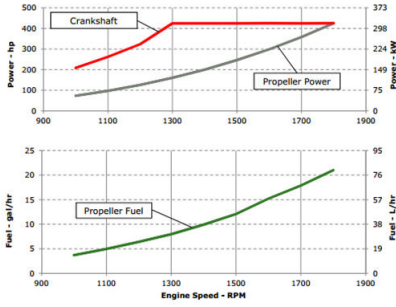


M2 Rating

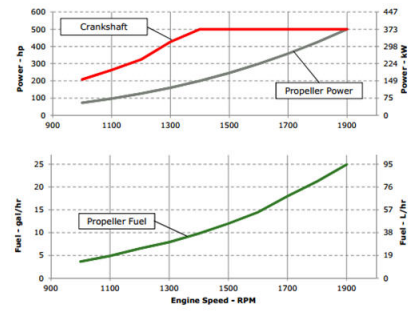


M3 Rating

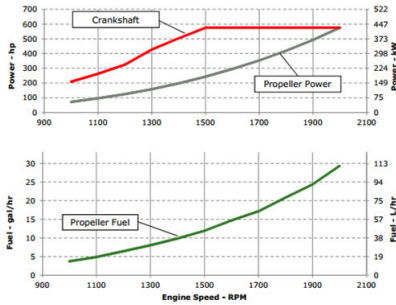

M4 Rating

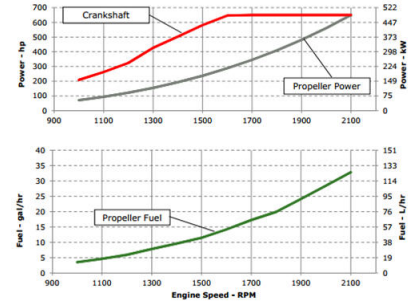

M5 Rating

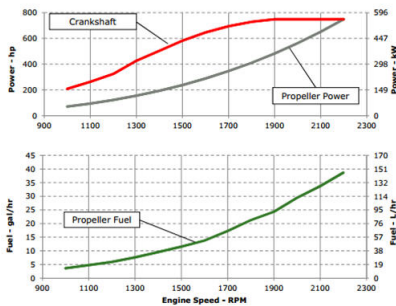

Performance data	M5	M4	M3	M2	M1
Rated Power - kW (hp)	559 (750)	485 (650)	429 (575)	373 (500)	317 (425)
Rated Speed - rpm	2200	2100	2000	1900	1800
Low Idle Speed - rpm	600	600	600	600	600
Peak Torque - Nm (ft-lb)	2913 (2149)	2877 (2122)	2731 (2014)	2544 (1876)	2328 (1717)
Peak Torque Speed - rpm	1700	1600	1500	1400	1300
Fuel Consumption - L/h (gal/hr)	145.9 (38.5)	124.7 (32.9)	110.9 (29.3)	94.4 (24.9)	79.5 (21.0)

M rating	M5	M4	M3	M2	M1
Typical load factor	< =35%	< =40%	< =50%	< =65%	> 65%
Typical annual usage (hr)	300-1,000 hr	1,000-3,000 hr	2,000-4,000 hr	3,000-5,000 hr	Unrestricted
Typical full-power operation (hr)	0.5 of each 8 hr	1 of each 12 hr	4 of each 16 hr	16 of each 24 hr	Uninterrupted

John Deere Power Systems
3801 W. Ridgeway Ave.
PO Box 5100
Waterloo, IA 50704-5100
Phone: 1-800-533-6446
Fax: 319.292.5075

John Deere Power Systems
Usine de Saran
La Foulonnerie - B.P. 11.13
45401 Fleury les Aubrais Cedex
France
Phone: 33.2.38.82.61.19
Fax: 33.2.38.82.60.00

All values at rated speed and power with standard options unless otherwise noted.
Specifications and design subject to change without notice.